


- APPLICATIONS

- For hot and cold water, non aggressive and non-pollutant steam and liquids.
- For maximum working pressure and temperatures:
  - 16 kg/cm<sup>2</sup> up to 120°
  - 14 kg/cm<sup>2</sup> up to 200 °
- The valve may be installed on both vertical and level pipelines.

- MATERIALS AND TECHNICAL CHARACTERISTICS:

- Body, bonnet, handwheel – cast iron
- Stem – stainless steel (13% Cr)
- Seat – stainless steel
- Flanges are drilled and dimensioned complying with DIN 2533 and UPI PN 16 standards.

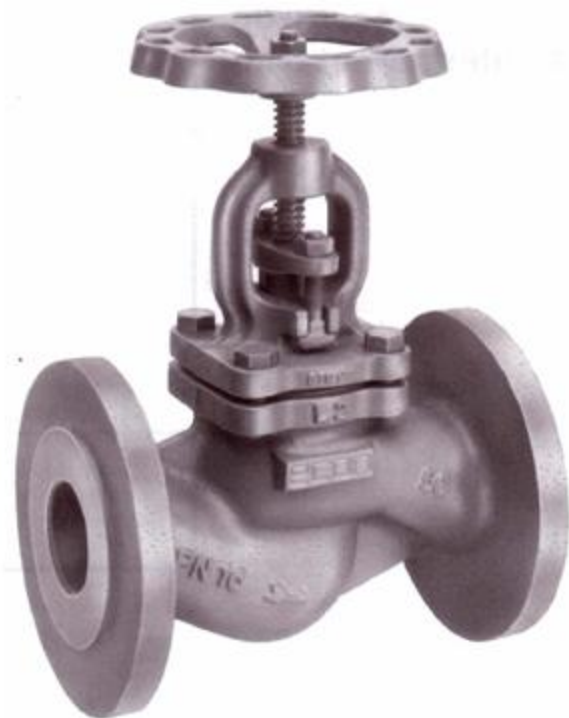

**DIMENSIONS**

DN	L	V + h	D1	D2	a	b	n	Kg wgt.
15	130	188	95	65	14	14	4	3.2
20	150	188	105	75	16	14	4	3.8
25	160	198	115	85	16	14	4	5.1
32	180	207	140	100	18	18	4	6.8
40	200	254	150	110	18	18	4	9.5
50	230	266	165	125	20	18	4	12.2
65	290	300	185	145	20	18	4	17.0
80	310	336	200	160	22	18	8	23.0
100	350	377	220	180	24	18	8	32.9
125	400	430	250	210	26	18	8	46.3
150	480	474	285	240	26	22	8	63.5
200	600	607	340	295	30	22	12	114.1

